

안전규격

기구설계

영업

09/30/M5 | 10/05/M5

전자

협

의

PRODUCTION RELEASE & REVISION								
REV	DESCRIPT'N/BUYER	DWG No	PARTS No.	BY	СНК	DATE		
Α	INITIAL / NO BRAND		50301993	S.A.PARK	N.C.PARK	10-05-M5		
						1		

NOTES

1.MODEL: HCM150 / All Brand

2MATERIAL: 일반인쇄용지 (WHITE)

4.COLOR: TEXT-BLACK

5.SIZE: 148(+/-5)mm x 210(+/-5)mm R: 0.0


6.ANY CHANGE OR ALTERNATION MUST BE APPROVED BY HITRON ENGINEERING.

도급품 50:	301993	ITEM	DESCRIPTION/MATERIAL QTY PARTS LIST		
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.	APPROVALS	DATE	DATE		
- TOLERANCE LABEL +/- 1.5 MANUAL +/- 3.5 ANGULAR +/- 0.5	N.C.PARK	10-05-M5	TITLE		
MATERIAL 2	CHKED		SIZE DWG No REV.		
FINISH 3	S.A.PARK	10-05-M5	P/N SCALE DO NOT SCALE		

CORNER MOUNT BRACKET INSTALLATION

Attach the corner mount to the structure using the tapping screws (PTS1, M6x30L) as illustrated in the figure. The corner mount must be attached to a structure such as hardwood, wall stud, concrete or a suitable material capable of supporting the final mount assembly. The installer may need to change the method of mounting or hardware used depending on the corner material.

Align the (wall) mount bracket holes to the corner mount plate holes and secure the bracket using the machine screws (M6x20L).

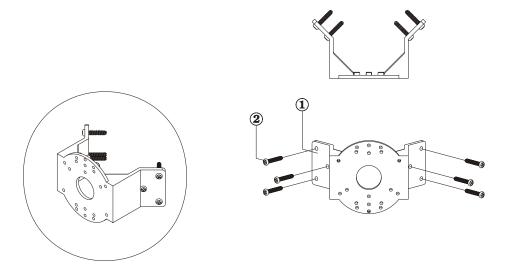

[INSTALLING PLATE AT THE WALL]

[CORNER MOUNT ASS'Y - EXPLODED VIEW]

PARTIIST

NO	PART NAME	Q'TY	DESCRIPTION
1	CORNER MOUNT PLATE	1	Aluminum, light gray polyester powder coat
2	TAPPING SCREW	6	T1+BH, M6x30L
3	MACHINE SCREW	6	PH M6X20L

Instruction Manual PRINTED IN KOREA