

COVERT COLOR CAMERA

TOWER CAMERA

CTV36PB






- ▶ 1/3" CCD, High Resolution 600TVL Color Camera
- ▶ Digital Day/Night Functionality for Low Light Applications
- ▶ Unique "Tower" Concept allows Close-Up, Eye-Level, Imaging of Customer's Facial Features, which is Superior to Video Image from Ceiling or Pendant Mounted Cameras
- ▶ Locking Mechanisms Ensure that Camera's View is not Inadvertently Changed once Installed in Defined Position
- ▶ Includes 3.6mm Lens for Excellent Wide Angle Image Capture
- ▶ Full Adjustment is available in Pan Angle, Height, and Camera Tilt to Customize the Image View: 16.9" - 23.9" Height, 90° Pan, 20° Tilt
- ▶ Flat Metal Base with Adhesive includes Options for Installing Cable with a Vertical Exit through the Counter Top or Horizontally through the Base with Easy-to-Remove Tabs.
- ▶ Standard BNC for Video Out
- ▶ 12VDC Power Supply Included (with Mating Connector)

SPECIFICATIONS

MODEL		CTV36PB
POWER	Power Source	12~15VDC
	Power Consumption	Max 1.5 Watts
GENERAL	Image Sensor	1/3" CCD
	Total Pixels	811(H) x 508(V)
	Scanning System	2:1 interlace
	Scanning Frequency	15.734KHz(H), 59.94Hz(V)
	Sync. System	Internal
	Electronic Shutter	1/60 ~ 1/100,000 sec.
	Resolution	600TVL
	Min. Illumination	0.1Lux Color, 0.04Lux B/W @ F1.2, 50 IRE
	Video Output	1.0 Vp-p (75 ohm, Composite)
FUNCTION	S/N Ratio	> 50dB (AGC off)
	Auto Exposure	ON
	White Balance	Auto (ATW)
	Day/Night	Auto
	Gamma	0.45
CONNECTOR	2D-DNR	ON
	Power Input	Terminal Block
	Video Output	BNC connector
	Lens Mount	Fixed mount
	Lens	3.6mm
	Operating Temperature	14° - 122°F (-10° - 50°C)
	Operating Humidity	0 ~ 96% (non-condensing)
	External Dimension (WxHxD)	2.9 x 19.3-26.3 x 2.9in (73.7 x 490.2 - 668 x 73.7mm); Base 5.2 x 5.2in (132.1 x 132.1mm)
	Weight	2.43 lbs (1.1kg)
	Standards Compliance	FCC, UL, CE, RoHS

DIMENSIONS

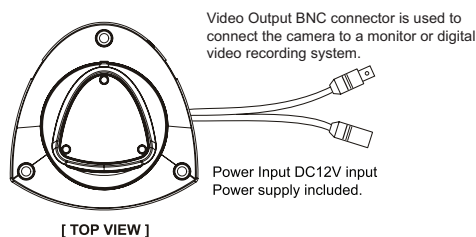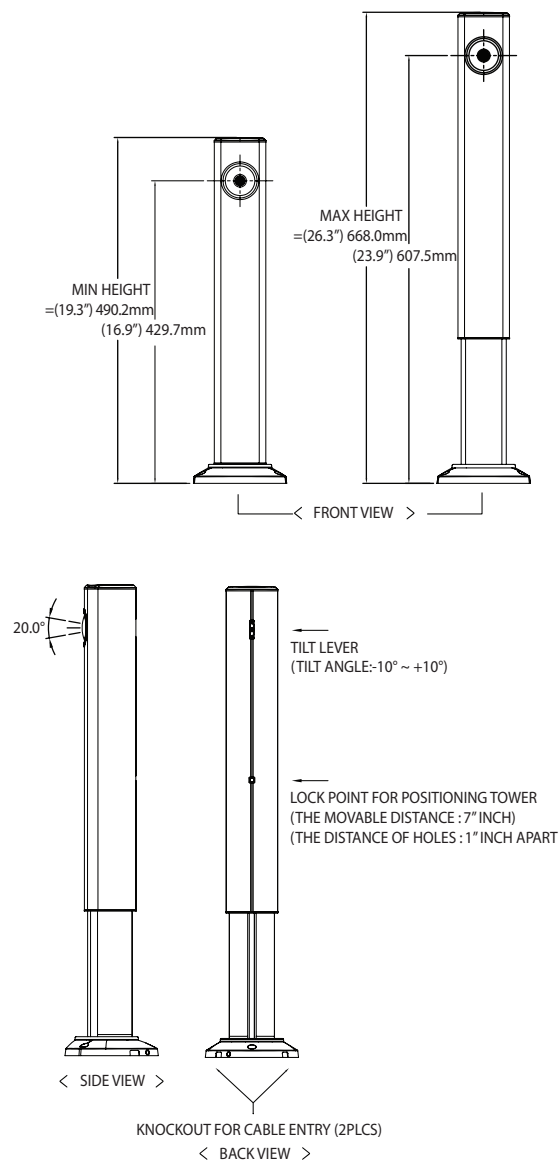

THE RANGE OF PANNING ANGLE : -45° ~ +45°

• To adjust the panning position of the tower camera.