

>>> COVERT 2MP, WDR, IP ATM CAMERA

COVERT IP CAMERA *IPCC2W*





- > Miniature Camera Perfectly Suited for Banking ATM and Covert Applications
- > Brilliant Video Quality with 2MP Full HD, 1920 x 1080 Resolution
- > Sony Exmor CMOS Sensor with Progressive Scanning for Sharper Video Motion Images
- > TRUE Wide Dynamic Range for High Contrast Lighting Conditions
- > Triple Streaming up to 60-ips @1080p Resolution, using H.264 and MJPEG Compression
- > Composite Video Output for Installation or Service Monitor
- > Video Content Analysis (Video Analytics) Features such as Line and Field Detector
- > Fixed 4.3mm Pinhole Lens
- > Digital Noise Reduction 3DNR, Digital Image Stabilization (DIS), Two-Way Audio and Corridor (Aisle) View Orientation Functions
- > A built-in Micro-SD Card Slot Enables Local Storage of Video
- > ATVision IP Remote Management Client Software for Windows and Mac and Mobile Applications for Apple and Android Operating Systems are included
- > ONVIF Profile S Compliant
- > Mounting Bracket and Hardware included
- > 12VDC/PoE Power Options
- > Auto Power Switch, Hot Failover Capability

SPECIFICATIONS

| MODEL | | IPCC2W |
|---------|---------------------------|--|
| CAMERA | Lens | Fixed Pin Hole 4.3mm F2.0 |
| | Angle of View | 75° (H) |
| | Image Sensor | 1/2.8" Sony Exmor CMOS; Pixels 2000 (H) x 1241 (V) |
| | Min. Illumination | Color: 0.5Lux (F2.0, 50IRE) |
| | Scanning Mode | Progressive Scan |
| | Wide Dynamic Range | True (120dB) |
| | Digital Noise Reduction | 2DNR, 3DNR |
| | Exposure Mode | Auto |
| | White Balance Mode | Automatic/Incandescent/Fluorescent/Outdoor |
| | Digital Zoom | Yes (ROI) |
| | Back Light Compensation | Enable/Disable Selectable |
| | Image Effect | Flip, Mirror, Corridor (Aisle), DIS, Defog |
| | Shutter Speed | Auto (1/10,000 to 1 sec), Manual |
| NETWORK | Video Compression | H.264(High, Main, Baseline Profile), MJPEG |
| | Video Resolution | 1920x1080 ~ 320x240 |
| | Video Frame Rate | Maximum 60fps |
| | Video Streaming | 60/50fps (Dual Stream: H.264 x 1, MJPEG x 1) 30/25fps (Triple Stream: H.264 x 2, MJPEG x 1) |
| | Audio | 2 Way, G.711 Compression |
| | Video Content Analysis | Line Detector, Field Detector |
| | Protocols | TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour |
| | FTP Uploading | MJPEG Still Image |
| | Privacy Mask | 8 Masks |
| | Motion Detection | 16 Programmable Zone |
| | Event Buffering | FTP: Pre : 30sec, Post : 30sec; SD Record: Pre : 10sec, Post : 60sec |
| | Security | Multi User Authority, IP Filtering, HTTPS, SSL |
| | Network Time Sync | NTP Server, Synchronized Computer, Manual |
| GENERAL | Software | Web, SmartManager, ATVision IP Client and Mobile |
| | Micro SD Card Recording | Continuous / Event |
| | Compatible 3rd Party VMS | See link on www.atvideo.com |
| | Video Composite Output | Terminal Block |
| | Audio | 1 Input/Output - Terminal Block |
| | Alarm | 1 Input/Output - Terminal Block |
| | Ethernet | RJ-45(10/100Base-T) |
| | Micro-SD Card | Micro-SDHC, Class 6 or above Rec'd; (Max. 32GB) |
| | Operating Humidity | 0 ~ 90% (non-condensing) |
| | Operating Temperature | 14° F - 122° F (-10°C - +50°C) |
| AL | Power Source | PoE(IEEE802.3af compliant, Class0), DC12V |
| | Power Consumption | DC12V - 5W POE - 5.5W |
| | Dimensions (W x D x H) | 2.1 x 2.1 x 1.9in (54x55x49.7mm) |
| | Weight | .5lbs (0.2kg) |
| | Conformity Certifications | FCC, CE, UL |

DIMENSIONS

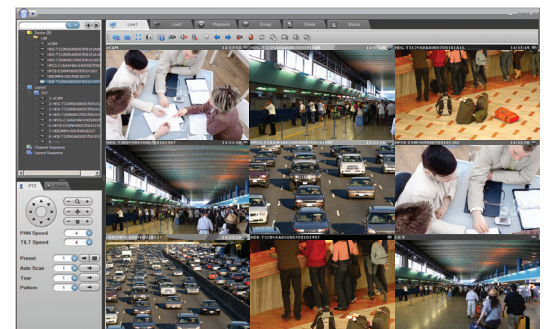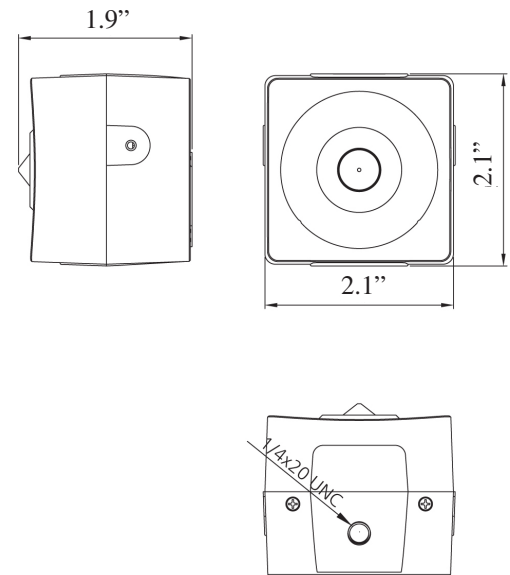

ATVision IP Remote Management Software

Minimum System Requirements for ATVision IP Software

- Operating System: Microsoft Windows 7 (or 8) Professional/Enterprise/Ultimate
- CPU: Intel Core i7; RAM: 4GB; Ethernet Connection: 1Gbps
- Graphics Card: Gaming Rated, with 1GB at 1080p for Single Monitor; 2GB at 1080p for Multiple Monitors
- HDD's: 7200RPM and 64MB cache; 1 separate HDD for Operating System and Software; and 1 (2TB) HDD for Recording (refer to IP storage calculator)