



ADVANCED
TECHNOLOGY
VIDEO

IP PRODUCT SERIES

>>> 1 CHANNEL, DUAL STREAM, D1 RESOLUTION, IP VIDEO ENCODER



IP VIDEO ENCODER **IPE1CH**

- > Converts 1 Channel of Analog Video into Network, IP Video
- > Exceptional D1, 704 x 576 Resolution
- > Highly Efficient H.264 Video Compression which Drastically Reduces Bandwidth and Storage Requirements
- > Dual Video Streams Simultaneously, up to 30-ips, at D1 Resolution using H.264 and MJPEG Compression
- > Equipped with RS-485 Port for Connecting PTZ Camera
- > Motion Detection (8 zones), Privacy Masking (8 Windows) and FTP Image Upload
- > Includes ATVision IP Remote Management Software
- > Accepted Web Browsers for Viewing Video with Windows Operating System include Internet Explorer, Safari, Firefox and Google Chrome
- > Supports Alarm In/Out and Two-Way Audio
- > Multi-user Authority, Privacy Zone, HTTPS and IP Filtering for Enhanced Data Protection
- > ONVIF Compliant for Network Video Interoperability
- > PoE & 12VDC/24VAC Power Options



IP VIDEO ENCODER



IPE1CH

IP PRODUCT SERIES

SPECIFICATIONS

MODEL	IPE1CH
V I D E O	Video In/Out
	BNC, 1.0Vp-p [75ohm, composite]
	Compression
	Motion JPEG, MPEG-4 Part2, H.264 (MPEG-4 Part 10) Profiles: H.264 MP and BP, MPEG-4 ASP and SP
	Resolutions
	4CIF, 2CIF, CIF, QCIF, VGA, QVGA, QQVGA Max. 704x480/704x576 [NTSC/PAL], Min. 160x120
	Frame Rate, H.264
A U D I O	Up to 30/25fps [NTSC/PAL] @ all resolutions
	Frame Rate, MPEG-4
	Up to 30/25fps [NTSC/PAL] @ all resolutions
	Frame Rate, MJPEG
	Up to 30/25fps [NTSC/PAL] @ all resolutions
	Video Streaming
	Simultaneously H.264 (or MPEG-4) and MJPEG Controllable Frame Rate and Bandwidth, VBR/CBR H.264 and MPEG-4
S E C U R I T Y	Security
	Multi-user authority, HTTPS, IP Filtering, Privacy Zone
	Supported Protocol
	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, SNMP, uPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour
I N T E R F A C E	Installation Tool
	Yes, SmartManager (included utility software)
	Upgrade
	Yes, SmartManager (included utility software)
R E M O T E	Remote Access
	ATVision IP Remote Management Software, Web Browser
	Max. Connection
	10
F E A T U R E	API Programming Interface
	API Supported, Open Platform Compatible: ONVIF
	Alarm Triggers
	Motion Detection, External Input, Video Loss
	Alarm Events
	File upload via FTP and HTTP, Notification via E-mail, HTTP and TCP External Output activation, Audio alert activation
	Video Buffering
	Pre and Post Alarm
	Motion Detection
	Yes, Max 8 window
	Privacy Mask
	Yes, Max 8 window
	Network Time Synchronization
	Yes
G E N E R A L	Software Reset
	Yes
	Factory Reset
	Yes, Button/Web browser
	Auto Recovery
	Yes
	Alarm In/Out
	1 TTL / 1 Relay Output
	Auxiliary
	1 x RS485
	Ethernet
	RJ-45 10BASE-T/100BASE-TX PoE
	LED Indicator
	Power, Network
	Operating Temperature
	32° - 122°F (0° - 50°C)
	Operation Humidity
	0~90% (non-condensing)
	Power Consumption
	AC24/DC12V max. 5watt, Power over Ethernet IEEE 802.3af Class2/3
	Dimensions (WxHxD)
	6.1 x 1.57 x 4.03in (155 x 40 x 102.4mm)
	Unit Weight
	1.0lb (.455kg)
	Conformity Certifications
	FCC, CE, MIC

DIMENSIONS

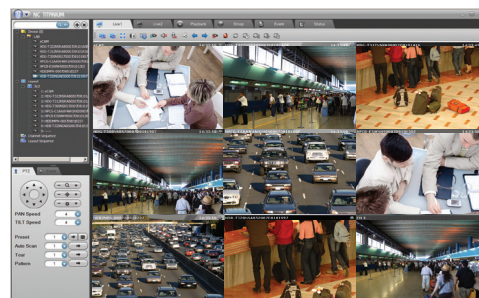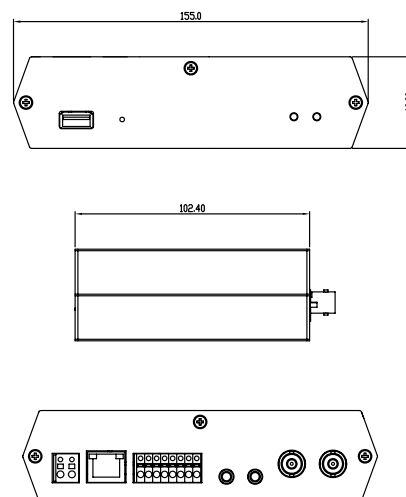

ATVision IP Remote Management Software

Minimum System Requirements for ATVision IP Software

- Operating System: Microsoft Windows 7 (or 8) Professional/Enterprise/Ultimate
- CPU: Intel Core i7; RAM: 4GB; Ethernet Connection: 1Gbps
- Graphics Card: Gaming rated, with 1GB at 1080p for Single Monitor; 2GB at 1080p for Multiple Monitors
- HDD's: 7200RPM and 64MB cache; 1 separate HDD for Operating System and Software; and 1 (2TB) HDD for Recording (refer to IP storage calculator)