



ADVANCED
TECHNOLOGY
VIDEO

IP PRODUCT SERIES

>>>2MP, TRIPLE STREAM, TRUE DAY/NIGHT,
WDR, ON-BOARD STORAGE, IP VANDAL DOME

WDR IP VANDAL DOME IPVD2TW

- > Brilliant Video Quality with 2MP Full HD, 1920 x 1080 Resolution
- > Highly Efficient H.264 Video Compression which Drastically Reduces Bandwidth and Storage Requirements
- > Progressive Scanning for Sharper Video Motion Images
- > 3-9mm Vari-focal Auto-Iris Lens
- > Triple Video Streams Simultaneously, up to 30-ips, at 1080p Resolution using H.264 and MJPEG Compression
- > TRUE Day/Night and Digital Wide Dynamic Range (WDR) functionality for all Lighting conditions
- > Supports a Micro-SD Memory Card Slot for Local, Event Detection Recording
- > Minimum Scene Illumination 0.3Lux Color; 0.03Lux B/W at F1.2, 50IRE
- > Backlight Compensation, 2D-DNR (Digital Noise Reduction) and Auto White Balance
- > Two-way Audio, Motion Detection (8 Windows), Privacy Masking (8 Windows) and FTP Image Upload
- > Up to 10 Simultaneous Connections through Remote Monitoring
- > View and Record up to 64 Cameras or View and Manage up to 64 NVR's, with included ATVision IP Remote Management Software
- > ONVIF Compliant for Network Video Interoperability
- > Test Monitor Cable Supplied
- > IP66 Weatherproof Rated and Impact Resistant Housing with Built-in Heater
- > Optional Wall and Pendant Mounts Available



ONVIF


WDR IP VANDAL DOME IPVD2TW

IP PRODUCT SERIES

SPECIFICATIONS

MODEL	IPVD2TW
CAMERA	Image sensor
	1/2.7" Progressive scan RGB CMOS
	Active Array
	1920(H) x 1080(V)
	Lens
	Varifocal 3.0mm ~ 9.0mm, F1.2 DC IRIS
CAMERA	Angle of View
	3.0mm - 93°(H) / 9.0mm - 31.7°(H)
	Camera Angle Adjustment
	Pan: 355°, Tilt: 70°, Rotation: 355°
	Min. Illumination
	Color: 0.3Lux, B/W: 0.03Lux(1.2, 50IRE)
CAMERA	Shutter Speed
	1/20,000 ~ 1/4
	Video Compression
	Motion JPEG, MPEG-4 Part2, H.264 (MPEG-4 Part 10)
	Profiles: H.264 MP and BP, MPEG-4 ASP and SP
	Video Resolutions
NETWORK	320x 240 ~ 1920x1080
	Frame Rate
	30fps @ all resolutions
	Video Streaming
	Simultaneously H.264(or MPEG-4) and MJPEG, Controllable
	Frame Rate and Bandwidth VBR/CBR H.264 and MPEG-4
NETWORK	Audio Compression
	G.711 ADPCM 40kbps-16kbps
	Audio Streaming
	2-way
	Protocol
	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, SNMP, uPnP,
NETWORK	RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour
	Security
	Multi-user authority, HTTPS, IP Filtering, Privacy Zone
	Remote Access
	ATVision IP Remote Management Software, Web Browser
	Max. Connection
NETWORK	10
	Compatible 3rd Party VMS
	See link on www.atvideo.com
	Alarm Triggers
	Motion Detection, External Input, Manual Trigger
	Alarm Events
NETWORK	File upload via FTP and HTTP, Notification via E-mail, HTTP and
	TCP, External Output activation, Audio alert activation
	Wide Dynamic Range
	Digital WDR (ATR-EX)
	Video Buffering
	Pre and Post Alarm
NETWORK	Motion Detection
	Yes, max. 8 programmable windows
	Network Time Synchronization
	Yes
	Micro-SD Card Recording
	Yes, Event
NETWORK	Software Reset
	Yes
	Factory Reset
	Yes, Button/Web browser
	Auto Recovery
	Yes
NETWORK	Installation Tool
	ATVision IP and SmartManager (included utility software)
	Upgrade
	ATVision IP/ Web browser/SmartManager (included utility software)
	Alarm Input
	Terminal, 1 TTL input
GENERAL	Alarm Output
	Terminal, 1 open collector
	Micro-SD Card
	Micro-SDHC class 6 or above recommended
	Ethernet
	RJ-45 10BASE-T/100BASE-TX
GENERAL	Operating Temperature
	-40° - 122°F (-40° - 50°C)
	Operation Humidity
	0~90% (non-condensing)
	Power Consumption
	AC24/DC12V max.5.6watt, (w/ heater max. 24.5W, 24VAC only);
GENERAL	Power over Ethernet IEEE 802.3af Class2/3
	Environmental Rating
	IP66
	External Dimension (Dia x H)
	5.9 x 4.9in (154 x 120mm)
	Unit Weight
	2.1lbs (.98kg)
GENERAL	Conformity Certifications
	FCC, CE, UL, MIC

DIMENSIONS

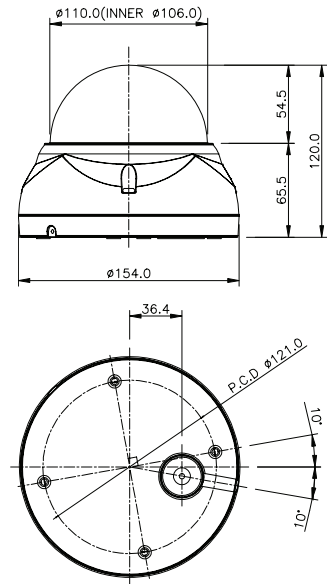

ATVision IP Remote Management Software

ACCESSORIES

- DB243W2 Wall Mount
- A-PEXM Ceiling Mount Bracket
- A-PPDM Ceiling Pipe Mount Adapter
- VDMWC2 Wall and Ceiling Mount
- PFMS7 Flush Mount



A-PEXM



A-PPDM



VDMWC2



PFMS7

Minimum System Requirements for ATVision IP Software

- Operating System: Microsoft Windows 7 (or 8) Professional/Enterprise/Ultimate
- CPU: Intel Core i7; RAM: 4GB; Ethernet Connection: 1Gbps
- Graphics Card: Gaming Rated, with 1GB at 1080p for Single Monitor; 2GB at 1080p for Multiple Monitors
- HDD's: 7200RPM and 64MB Cache; 1 separate HDD for Operating System and Software; and 1 (2TB) HDD for Recording (refer to IP storage calculator)