

HIGH RESOLUTION LCD 17", 19" AND 22" VGA MONITORS

LCD MONITORS

ML757
ML970W
ML2200W



- ▶ 3-D Comb-filter for Superior Noise Reduction
- ▶ VGA Input (Analog Video) D-sub 15 Pin Connector (Cable supplied)
- ▶ High Brightness and High Contrast Ratio
- ▶ Long Life Backlight
- ▶ Excellent Visibility with Wide Viewing Angles
- ▶ Full Set of Video Controls
- ▶ Desktop Stand included
- ▶ Narrow Bezel Monitors Designed for Limited Space Applications
- ▶ Convenient and User Friendly On-Screen Display (OSD) Controls
- ▶ Various VESA Compliant Wall Mounts available (Note: Mounting Screws are not included with these Mounts --- Screw required is M6 x 7/8")

LCD MONITORS


ML757 / ML970W / ML2200W

PERFORMANCE SERIES


SPECIFICATIONS

	MODELS	ML757	ML970W	ML2200W
MONITOR	LCD Panel	17.0 inch diagonal	19.0 inch diagonal Wide Screen	22.0 inch diagonal Wide Screen
	Pixel Pitch	0.264 x 0.264	0.2835 x 0.2835	0.282 x 0.282
	Resolution	1280 x 1024 @60Hz	1440 x 900 @60Hz	1680 x 1050 @60Hz
	Scanning Frequency	H-(30~80KHz), V-(56~75Hz)	H-(30~80KHz), V-(56~75Hz)	H-(30~80KHz), V-(56~75Hz)
	Viewing Angle	150°(Right/Left) 135°(Up/Down)	160°(Right/Left) 160° (Up/Down)	160° (Right/Left) 160° (Up/Down)
	Contrast Ratio	700:1 (typ)	800:1 (typ)	1000:1 (typ)
	Color depth	16.2M Colors	16.7M Colors	16.7M Colors
	Response Time	5ms	5ms	5ms
	Brightness	250cd/m2 (typ)	300cd/m2 (typ)	300cd/m2 (typ)
	Input Connector	D-Sub 15Pin (VGA)	D-Sub 15Pin (VGA)	D-Sub 15Pin (VGA)
ELECTRICAL	Plug & Play	DDC 1/2B	DDC 1/2B	DDC 1/2B
	Voltage	100~240VAC@50/60Hz	100~240VAC@50/60Hz	100~240VAC@50/60Hz
	Power type	Adapter 12VDC	Built-in	Built-in
	Consumption	26 Watts (typ)	26 Watts (typ)	45 Watts (Typ)
	Power Management	VESA DPMS compliant	VESA DPMS compliant	VESA DPMS compliant
MECHANICAL	Desk Stand Tilt range	5° Forward / 30° Backward	5° Forward / 30° Backward	5° Forward / 30° Backward
	Wall mount option	VESA Standard (100x100mm)	VESA Standard (100x100mm)	VESA Standard (100x100mm)
	Operating Temperature	50°~104°F (10°~40°C)	50°~104°F (10°~40°C)	50°~104°F (10°~40°C)
	Humidity	8% ~ 80%	8% ~ 80%	8% ~ 80%
	Dimension (WxLxH)	15.1 x 6.3 x 14.8 in (382.9 x 159 x 385.6mm)	17.9 x 7.6 x 14.8 in (457 x 202 x 377 mm)	20.6 x 6.3 x 16.5 in (523 x 159 x 420mm)
	Weight	10.14 lbs (4.6 kg)	9.5 lbs (4.3 kg)	14.3 lbs (6.5 kg)
	Compliance	UL, FCC, CE	UL, FCC, CE	UL, FCC, CE


DIMENSIONS

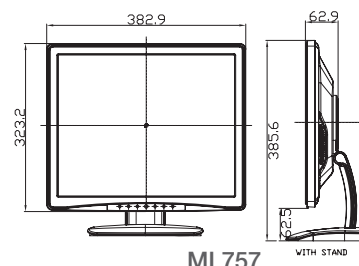

ML757

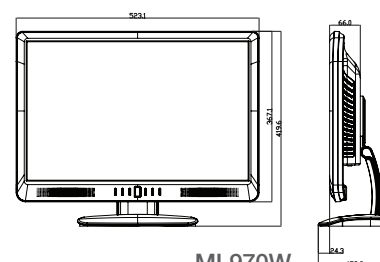

ML970W

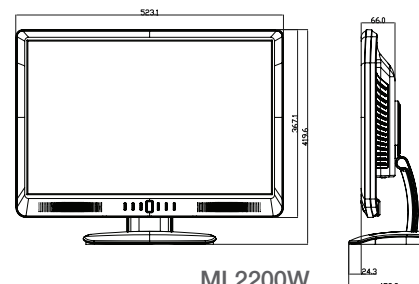


ML2200W

OPTIONAL ACCESSORIES

- A-CS777 Mount, LCD, wall, 75/100mm VESA, 2-knuckle
- PA730 Mount, articulating arm, wall, 1.23 ~ 14.46", black
- SF630P Mount, flat, wall, 1", black
- ST630P Mount, tilt, wall, +15°/-5°, 1.6", black

Refer to ATV6021108-03 "Small LCD/PVM Panel Mounts" for other mount options



A-CS777



PA730



SF630P
Available in
black



ST630P
Available in
black

Advanced Technology Video | 850 Freeport Pkwy., Ste.100, Coppell, TX 75019
Toll Free 888.288.7644 | Main 972.459.8645 | Fax 972.459.8661

©2011 ATV All rights reserved. Specifications and Design are subject to change without notice.



ATV8071209-02