

## COVERT COLOR CAMERA

### TOWER CAMERA

# CTHS36PB



- ▶ High Resolution 540TVL Color Camera
- ▶ 1/3" Sony Super HAD CCD
- ▶ 3.6mm Fixed Lens
- ▶ Adjustable Camera Height: 16.9" - 23.9" Height, 90° Pan, 20° Tilt
- ▶ Flat Metal Base Option with Adhesive Included
- ▶ Standard BNC for Video Out
- ▶ 12VDC Power Supply Included (with Mating Connector)
- ▶ Available in a Black Case


# TOWER CAMERA CTHS36PB

SPECIALTY  
CAMERA SERIES


## SPECIFICATIONS

MODEL		CTHS36PB ~ Covert Color Camera
POWER	Power Source	12~15VDC
	Power Consumption	Max 1.5 Watts
GENERAL	Image Sensor	1/3" Sony Super-HAD CCD
	Total Pixels	811(H) x 507(V)
	Scanning System	2:1 interlace
	Scanning Frequency	15.734KHz(H), 59.94Hz(V)
	Sync. System	Internal
	Electronic Shutter	1/60 ~ 1/100,000 sec.
	Resolution	540 TVL
	Min. Illumination	1.0 Lux (Color @ F1.2, 50 IRE)
	Video Output	1.0 Vp-p (75 ohm, Composite)
FUNCTION	S/N Ratio	> 50dB (AGC off)
	Auto Exposure	ON
	White Balance	ATW Fixed
	Gain Control	Auto
	Gamma	0.45
CONNECTOR	BLC	ON
	Power Input	DC Jack
	Video Output	BNC connector
	Lens Mount	Fixed mount
	Lens	3.6mm
	Operating Temperature	32°F ~ 104°F (0°C ~ +40°C)
	Operating Humidity	0 ~ 96% (non-condensing)
	External Dimension	2.9" W x 19.3" ~ 26.3" H x 2.9" D Base: 5.2" x 5.2"
	Weight	2.43 lbs (1.1kg)
	Shipping Weight	3.75 lbs (1.7kg)
Standards Compliance	FCC, UL, CE, RoHS	

## DIMENSIONS


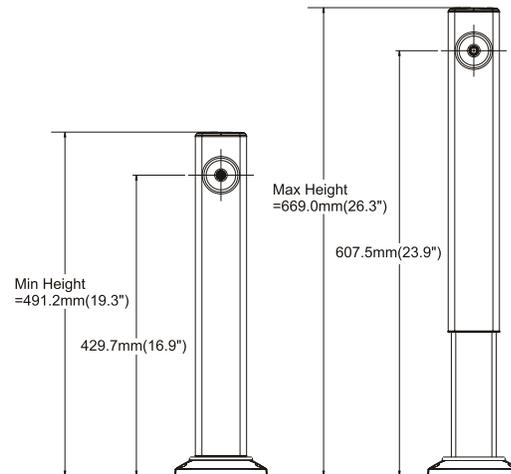


[ FRONT VIEW ]

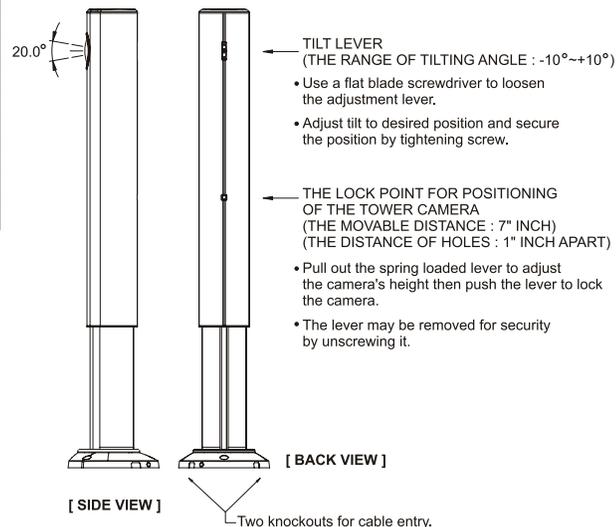

## ACCESSORIES

P3DC12-8-10CB 8 channel, 12VDC, 10A circuit breaker  
PS12V Power Supply, 12VDC, 300ma, 2.1mm power plug

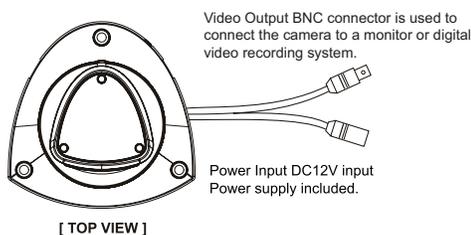

THE RANGE OF PANNING ANGLE : -45° ~ +45°

- To adjust the panning position of the tower camera.